

WINDOW / WALL AIR CONDITIONERS 2021

ROOM AIR CONDITIONING



Welcome Home to TECO

ENGINEERED TO PERFORM

For over 60 years we have delivered market leading electrical motors worldwide. Powering the largest machines in ships, mines, quarries, plants & refineries. Our strength is diversification with expertise in state of the art products and services across telecommunications, IT solutions, automation, wind turbines, electric vehicles and home appliances.

THE QUIET ACHIEVER

In Australia, we are the market leader in industrial motors and have been for over 30 years. This has paved the way for our success in home appliances - air conditioners, fridges, freezers, washing machines and clothes dryers. We supply to many mine sites and commercial businesses in the harshest places from the Pilbara to Kalgoorlie to Papua New Guinea. Our designs, functionality and performance are backed by our inhome dedicated service network.

QUALITY & RELIABILITY

Our heavy industrial expertise nurtures our commitment to quality and reliability in all our products. Whether it is an air conditioner for a small room or a multi split system to cool or heat your entire home - TECO has you covered with the strength of our global brand and comfort you can rely on.



\$3Billion USD Net Worth







Window / Wall Mounted AC

For over 30 years, TECO has provided Australia with Window / Wall Mounted Air Conditioners. This type of unit is perfect for the replacement of outdated and less efficient models. We have designed our unit sizes around standard, pre-existing cut outs for easy-fit wall mounting. For the ever-moving house hunters, our units can be relatively easy to install or uninstall depending on the location – window or wall. Therefore, you could potentially take your Window / Wall Mounted Air Conditioner when you go.

This gives you the flexibility in choosing your installation location to suit your needs today and tomorrow. This product also lends itself to applications where a wall split or ducted system is not an option due to the building or housing modifications associated.





WINDOW / WALL MOUNTED AC

BENEFITS

TECO continues to provide high quality and affordable air conditioners with the latest R32 refrigerant technology and convenient features, all backed by a nationwide service network.



R32 Refrigerant

Using R32 refrigerant, which transfers heat efficiently, resulting in approximately 10% less electricity consumption when compared to other refrigerants. It also has a significant (up to 1/3) lower environment impact also referred to as Global Warming Potential (GWP).



Wireless Remote

The convenient wireless remote lets you power on and off, set and adjust air conditioner settings from the comfort of your chair.

(Excludes TWW16CFDG)



Sling System

Condensate water that develops while in cooling mode is reused by the Sling System fan to agitate the water onto the condenser. This assists to increase efficiency and reduces the need for drainage in Cooling mode.

(Excessive humidity may generate the need for condensate to be drained away).



Auto Restart

The operation mode, set temperature, and the fan speed you have selected are memorised by the system. The AUTO RESTART function sets to work restoring your settings the moment power has been restored after a power failure.



Gold Fin Protection

Gold fin protection provides peace of mind as it prolongs the life of the aluminium Condenser fins, by preventing the accumulation of harmful corrosive acids, salts and air borne contaminants, thereby prolonging the performance



Removable Panel

The front panel can be removed to easily access the unit for cleaning.

and lifespan of your Air Conditioner



Sliding Chassis

Installation and servicing is made easy with the slide out casing.



Fresh Air Switch

This feature draws fresh air from outside and expels air from the inside.



Left & Right Auto Air Flow

Ensures even air flow distribution.



Rotary Compressor

With a rotary compressor, noise and vibration is reduced.



Dual Drainage

Multiple drainage points assist with providing efficient drainage.

- Running Current is at rated conditions (AS/NZS 3823) and does not include compressor start-up or variations in power supply and load conditions.
- Indoor unit sound levels are determined in an anechoic chamber at a distance of I metre
 from the front of the unit. They may be slightly higher during actual operation due to
 ambient conditions.
- Due to continuous product improvements, specifications are subject to change without prior notice.
- Some of the mentioned features may not be available in all models.
- Please refer to the warranty conditions on our website for commercial and domestic products - http://www.teco.com.au/assets/warranty




All capacity and energy efficiency ratings are based on the 2019 gems <65kw determination for all TECO window wall air conditioners featured in this brochure.


For more information, please visit : www.energyrating.gov.au/products/air-conditioners





WIRELESS CONNECTIVITY*

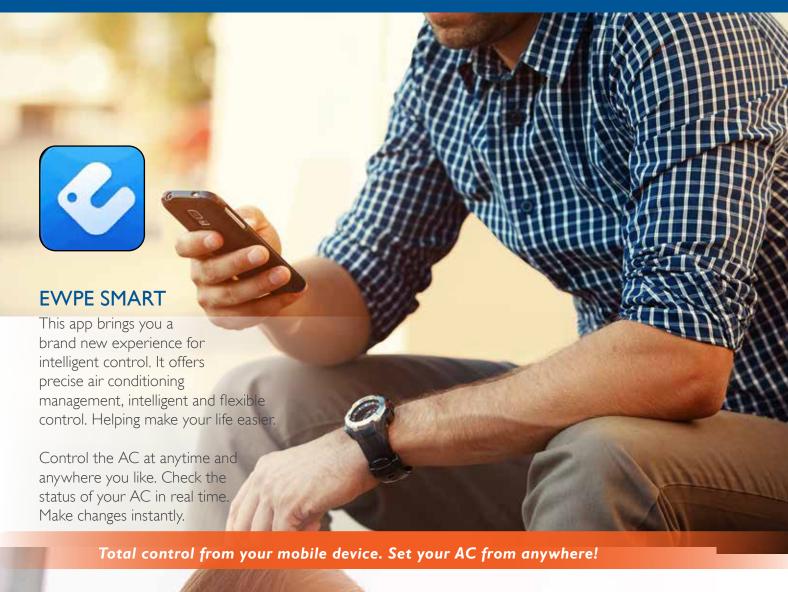


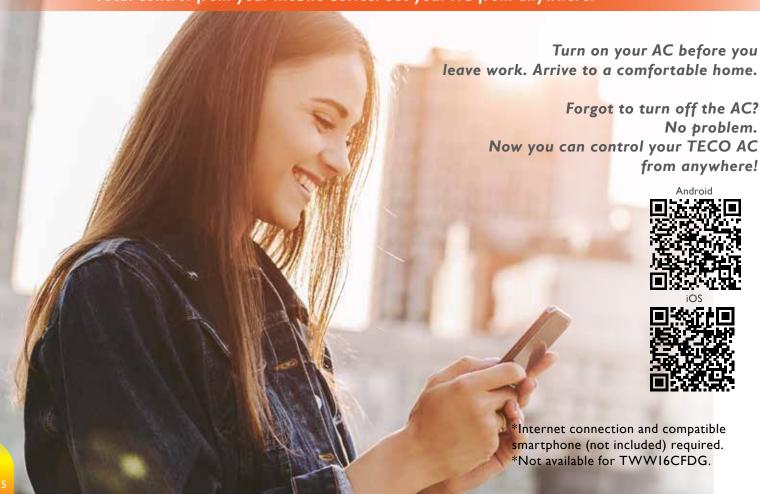

SILVER ION FILTER

An advanced filter that is highly effective for reducing harmful bacteria, viruses, fungi, spores, and common allergens from the air circulating throughout the room.

The filter generates and releases silver ions into the air stream from the air conditioner where they attach to microorganisms, deactivating microbes on a molecular level. Effectively preventing reproduction and growth. In addition to long term sterilization, the silver ion filter is environmentally friendly, safe and effective at reducing harmful airborne contaminants.

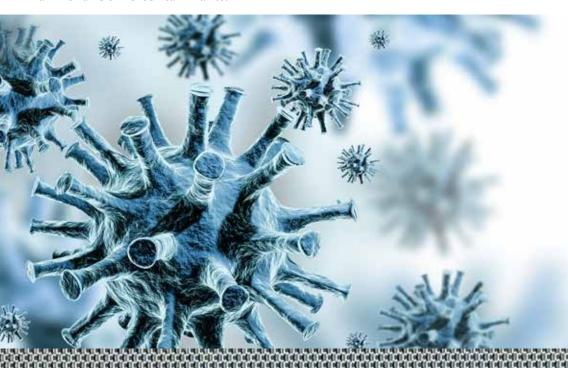

TECO's Silver Ion Filters - Reducing harmful contaminants in the air.



WINDOW / WALL SPECIFICATIONS

| TECO W | /indow / Wal (cool only) | l Model | TWWI6CFDG TWV | | V22CFWDG TWW27C | | CFWDG | FWDG TWW40CFWDG | | TWW53CFWDG | | TWW60CFWDG |
|---|---|--------------|-----------------|-----------------|-----------------|-----------------|----------------|-----------------|--------------|-----------------|--------------|-----------------|
| Power Supply | | V-Ph-Hz | 220~240 - 1-50 | 220~ | 240 - I-50 | 220~240 - 1-50 | | 220~240 - 1-50 | | 220~240 - 1-50 | | 220~240 - 1-50 |
| Cooling Capacity | | kW | 1.6 | 2.2 | | 2.7 | | 3.9 | | 5.3 | | 6.0 |
| Rated Run Current | | Α | 2.40 | 2.87 | | 3.63 | | 5.13 | | 6.96 | | 7.87 |
| Plug Size | | Α | 10 | | 10 | 10 | | 10 | | 10 | | 15 |
| _ | Input | | 480 | | 660 | 825 | | 1180 | | 1600 | | 1810 |
| Moisture Removal | | L/hr | 1.15 | | 1.0 | 1.0 | | 1.5 | | 2.2 | | 2.2 |
| A.E | A.E.E.R | | 3.3 | | 3.3 | 3. | 3 | 3.3 | | 3.3 | | 3.3 |
| | Star Rating* (Hot / Avg. / Cold) | | 2 / 1.5 / 1.5 | 2 | /2/2 | 2/2/2 | | 1.5 / 1.5 / 1.5 | | 2 / 1.5 / 2 | | 1.5 / 1.5 / 1.5 |
| Fan Speeds | | | 3 + Fan | 3 · | + Auto | 3 + Auto | | 3 + Auto | | 3 + Auto | | 3 + Auto |
| | Indoor Cooling Air Flow (max) | | 102 | 133 | | 133 | | 177 | | 216 | | 238 |
| Compressor Type | | | Rotary | R | otary | Rot | ary | Rotary | | Rotary | | Rotary |
| Indoor Sound Pressure (Hi / Med / Low) | | dB(A) | 49 / 47 / 45 | 50 / 48 / 46 | | 50 / 48 / 46 | | 50 / 48 / 46 | | 55 / 53 / 51 | | 55 / 53 / 51 |
| | Outdoor Sound Power | | 66 | 64 | | 64 | | 70 | | 72 | | 71 |
| Dimension (H*W*D) | | mm | 350 x 450 x 580 | 375 x 560 x 668 | | 375 x 560 x 668 | | 428 x 660 x 700 | | 428 x 660 x 770 | | 428 x 660 x 770 |
| Packing (H*W*D) | | mm | 359 x 518 x 668 | 410 x 620 x 763 | | 410 x 620 x 763 | | 490 x 736 x 790 | | 490 x 736 x 860 | | 490 x 736 x 860 |
| Net / Gross Weight | | Kg | 29 / 32 | 35 | 38.5 | 39 / 42.5 | | 48 / 52 | | 58 / 62 | | 61 / 65 |
| Recommended Cut-out Size (H*W) | | mm | 355 x 455 | 38 | 0 x 565 | 380 x | 565 | 433 x 665 | | 433 x 665 | | 433 x 665 |
| Refrigerant Type | | | R32 | R32 | | R32 | | R32 | | R32 | | R32 |
| | Outdoor Operation Temperature | | 18~43 | ı | 8~43 | 18~43 | | 18~43 | | 18~43 | | 18~43 |
| TECO Window / W (reverse cycl | | | TWW22HF\ | W22HFWDG | | HFWDG TWW | | 40HFWDG TW | | /W53HFWDG 1 | | TWW60HFWDG |
| Power supply | | V-Ph-H | z 220~240 - | I-50 | 220~240 |) - I-50 | 220~240 - 1-50 | | 220 | 220~240 - 1-50 | | 220~240 - I-50 |
| Cooling | Capacity | kW | 2.2 | 2.2 | | 2.8 | | 3.9 | | 5.3 | | 6.0 |
| | Input | W | 660 | 660 | | 840 | | 1180 | | 1600 | | 1810 |
| | Rated Run | Α | 2.87 | 2.87 | | 3.63 | | 5.13 | | 7.87 | | 7.87 |
| | Current | | | | | | | | | | | |
| | A.E.E.R Star | /I I a 6 / A | 3.3 | | | 3.3 | | 3.3 | | 3.3 | | 3.3 |
| | Rating* | (Hot / Av | 2 / 1.5 / | 2 / 1.5 / 2 | | 2 / 1.5 / 1.5 | | 1.5 / 1.5 / 1.5 | | 2 / 1.5 / 1.5 | | 1.5 / 1.5 / 1.5 |
| Heating | Capacity | kW | 1.90 | 1.90 | | 2.45 | | 3.60 | | 4.80 | | 5.52 |
| | Input | W | | 570 | | 740 | | 1060 | | 1450 | | 1690 |
| | Rated Run Current | A | 2.48 | 2.48 | | .5 | 4.53 | | 7.35 | | 7.35 | |
| | A.C.O.P. | | 3.3 | 3.3 | | 3.3 | | 3.3 | | 3.3 | | 3.25 |
| | Star Rating* | (Hot / Av | g. / | 1 / 1 / 0.5 | | 2 / 0.5 / 0.5 | | 1 / 1 / 0.5 | | 1 / 0.5 / 0.5 | | 1 / 0.5 / 0.5 |
| Plug Size | | A | 10 | 10 | |) | | 10 | | 10 | | 15 |
| Moisture Removal | | L/hr | 1.0 | 1.0 | | | | 1.5 | | 2.2 | | 2.2 |
| Fan Speeds | | | 3 + Aut | | | | | | | 3 + Auto | | 3 + Auto |
| Indoor Cooling Air Flow (max) | | L/s | 133 | 133 | | | | 186 | | 264 | | 250 |
| Compressor Type | | | Rotary | Rota | | ary | y Rotai | | y Rotary | | \top | Rotary |
| | Indoor Sound Pressure (Low / Med / Hi) | | 50 / 48 / 4 | 16 50 / 48 | | 3 / 46 | 50 / 48 / 46 | | 55 / 53 / 51 | | 56 / 54 / 52 | |
| Outdoo | Outdoor Sound Power | | 64 | 66 | | 5 | | 69 | | 71 | | 73 |
| Dimension (H*W*D) | | mm | 375 x 560 x | 668 375 x 560 | | 0 x 668 | 428 x | 360 x 700 428 | | 8 x 660 x 770 | | 428 × 660 × 770 |
| | Packing (H*W*D) | | 425 x 623 x | | | | 505 x | 739 x 793 505 | | 5 x 739 x 863 | | 515 x 739 x 863 |
| Net/Gross weight | | Kg | 36 / 39. | | | | | 1 / 55 | | 64 / 69 | | 65 / 70 |
| Recommended Cut-out Size (H*W) | | mm | 380 x 565 | | 380 x 565 | | 433 x 665 | | , | 433 x 665 | | 433 x 665 |
| Refrigerant Type | | | R32 | | R32 | | R32 | | | R32 | | R32 |
| Outdoor Cooling | | °C | 18~43 | 18~4 | | <u> </u> | | 8~43 | 18~43 | | \top | 18~43 |
| Operation Temp. | Operation | | -7~30 | | -7~30 | | | -7~30 | | -7~30 | | -7~30 |

All capacity and energy efficiency ratings are based on the 2019 gems <65kw determination for all TECO window wall air conditioners featured in this brochure.

For more information, please visit: www.energyrating.gov.au/products/air-conditioners
Running current is at rated conditions (AS3823) and does not include compressor start-up or variations in power supply and load conditions. Indoor temperature Outdoor temperature 27°C DB / 19°C WB 35°C DB / 24°C WB Heating 20°C DB / 15°C WB Indoor temperature Outdoor temperature 7°C DB / 6°C WB



The strength of a global brand. Comfort you can rely on.



TAC-WW-TE-05.21











1300 660 037

sales@teco.com.au | www.teco.com.au



www.teco.com.au

Tel: +61 2 9765 8118 Fax: +61 2 9765 8185

16 Longstaff Road, Baywater VIC 3153 Tel: +61 3 9720 4411 Fax: +61 3 9720 5355

50 Murdoch Circuit, Acacia Ridge QLD 4110 Tel: +61 7 3373 9600 Fax: +61 7 3373 9699

18 Hazelhurst Street, Kewdale WA 6105

